



ROSWELL ROAD TYPICAL SECTION  
(SEE TYPICAL SECTIONS BELOW FOR SPECIFIC STATIONS)

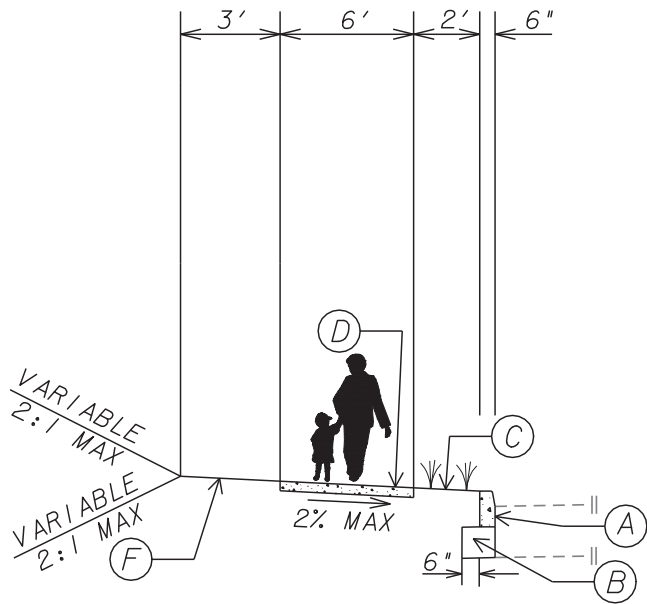

SHOULDER TYPICAL SECTION  
TS-02

STA. 140+00 TO 141+90 LT.

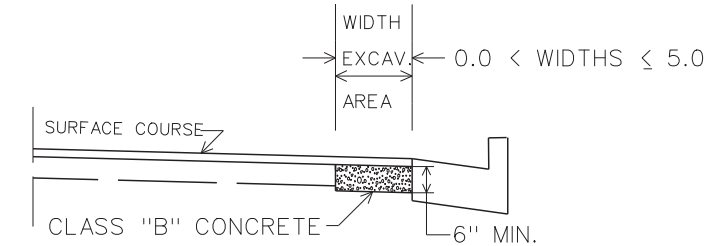


NO SCALE  
CLASS "B" CONCRETE BASE OR PAVEMENT WIDENING  
Item Code 500-9999 - Cu. Yds.

In excavated areas between the existing paving and new curb and gutter that are 5'-0" or less in width, Class "B" concrete shall be placed in lieu of the base and paving specified by the typical section. Payment will be made under "Class B Concrete Base and Pavement Widening".

In excavated areas greater than 5'-0" in width, the Contractor shall place base and paving as specified on the typical section.

See plans for details of curb and gutter construction.

CLASS "B" CONCRETE  
BASE OR WIDENING DETAIL

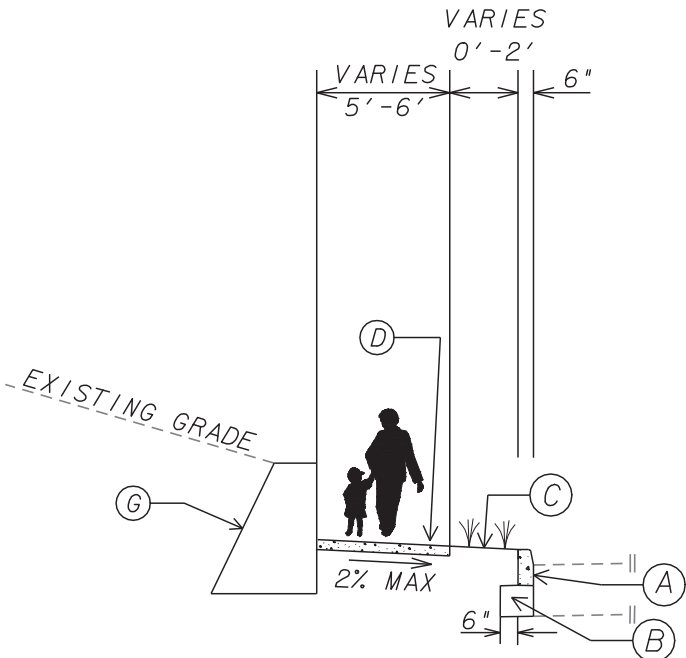

SHOULDER TYPICAL SECTION  
TS-01

STA. 138+84 TO 140+00 LT.

REQUIRED PAVEMENT

- (A) TYPE 2 HEADER CURB GDOT STD. 9032B
- (B) GRADED AGGREGATE BASE, 6", INCL MATL
- (C) SOD STRIP
- (D) SPECIAL DETAIL - CONCRETE SIDEWALK DETAILS - CURB CUT (WHEELCHAIR) RAMPS, CONCRETE SIDEWALK, 4" THICK
- (E) PARAPET WALL WITH HANDRAIL, GDOT DETAIL PW-1
- (F) GRASS STRIP
- (G) GRAVITY WALL GDOT STD. 9031L (MORTAR RUBBLE WALL)
- (H) 6" X 30" CONC CURB & GUTTER GDOT STD. 9032B



REVISION DATES			CITY OF SANDY SPRINGS PUBLIC WORKS	
			TYPICAL SECTIONS	
			ROSWELL ROAD SIDEWALK FROM MYSTIC DRIVE TO LONG ISLAND DRIVE	
				DRAWING No. 05-001